

# AIMB-588

Intel® 12th Gen Core™ processors  
(Alder Lake-S) i9/i7/i5/i3 LGA1700,  
MicroATX with 2 DP/HDMI/eDP,  
1 GbE LAN, 3 2.5GbE LANs, 8 USB 3.2,  
1 USB 3.2 Type-C, 6 COM



## Features

- Supports Intel® 12th Gen Core™ processors (Alder Lake-S) with Q670E/R680E/ H610E chipset
- Supports up to 32GB DDR5 4800 MT/S with four UDIMMs
- Four displays. (x2 DP++, HDMI, eDP)
- Intel AMT and Intel vPro Technology
- PCIe x16 slot Gen5, PCIe x4 slot Gen4, PCIe x4 slot Gen3
- Max up to x8 USB 3.2, x1 USB 3.2 Gen2 Type C, x4 USB 2.0, x8 SATAIII, x1 GbE LAN, x3 2.5GbE LANs, x1 M.2 M-Key
- Software VMD 0, 1, 5, 10, TPM 2.0
- WISE-DeviceOn and Embedded Software APIs

### Software APIs:




### Utilities:



## Specifications

	CPU	i9-12900E/ i9-12900TE	i7-12700E/ i7-12700TE	i5-12500E/ i5-12500TE	i3-12100E/ i3-12100TE	G7400E/ G7400TE	G6900E/ G6900TE	i9-12900	i7-12700	i5-12500	i5-12400	i3-12100	
Processor System	Core Number (Performance and Efficient core)	8P+8E	8P+4E	6P+0E	4P+0E	2P+0E	2P+0E	8P+8E	8P+4E	6P+0E	6P+0E	4P+0E	
	Max. Speed	5.0GHz/4.8GHz	4.8GHz/4.7GHz	4.5GHz/4.3GHz	4.2GHz/4.0GHz	3.6GHz/3.0GHz	3.0GHz/2.4GHz	5.10GHz	4.9GHz	4.6GHz	4.4GHz	4.3GHz	
	Intel Smart Cache	30MB/30MB	25MB/25MB	18MB/18MB	12MB/12MB	6MB/6MB	4MB/4MB	30MB	25MB	18MB	18MB	12MB	
	TDP (W)	65W/35W	65W/35W	65W/35W	60W/35W	46W/35W	46W/35W	65W	65W	65W	65W	60W	
	ECC memory support (with chipset R680E)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Supports Model	AIMB-588Q, AIMB-588R, AIMB-588H											
Expansion Slot	Chipset	Q670E/R680E/H610E											
	BIOS	AMI BIOS UEFI 256 Mbits SPI											
	PCIe x16 (Gen5)	1 slot											
	PCIe x8 (Gen4)	(1 slot, optional)											
	PCIe x4 (Gen3)	1 slot											
Memory	PCIe x4 (Gen4)	1 slot											
	Technology	Dual Channel DDR5 up to 4800 MT/s, ECC memory supported by all CPU only with Chipset R680E											
	Max. Capacity	128GB (32 GB per DIMM)											
	Frequency	4800MT/s (1DPC - 1DIMM 1R&2R), 4400MT/s (2DPC - 1DIMM 1R&2R), 4000MT/s (2DPC - 2DIMM 1R), 3600MT/s (2DPC - 2DIMM 2R)											
	Socket	588R/588Q: Four 288-pin DDR5 UDIMM sockets( Dual Channel, Two DIMMs per channel). 588H: Two 288-pin DDR5 UDIMM sockets, (Dual Channel, One DIMM per channel).											
Graphics	Controller	Intel UHD Graphics 770											
	HDMI	Supports DirectX12, OpenGL 4.5 1, up to resolution 4096*2160@ 60Hz. Supports HDR											
	eDP	1, up to resolution 3840 x 2160 @ 60 Hz (Internal pin header)											
	Display Port	2, up to 4096 x 2304 @ 60Hz											
	Four Display	DP + DP + HDMI + eDP (R/Q sku)											
	Triple Display	DP + DP + HDMI, DP + DP + eDP, DP + HDMI + eDP											
Ethernet	Dual Display	DP + HDMI, DP + DP, DP + eDP, HDMI + eDP											
	Controller	LAN1: 1GbE Intel I219-LM (AIMB-588Q/AIMB-588R/AIMB-588H) LAN2: 2.5GbE Intel I226LM (AIMB-588R); 2.5GbE Intel I226V (AIMB-588Q) LAN3: 2.5GbE Intel I226LM (AIMB-588R) LAN4: 2.5GbE Intel I226LM (AIMB-588R)											
	Connector	RJ45 x2 (588Q) / RJ45 x4 (588R) / RJ45 x1(588H)											
SATA	Max Data Transfer Rate	600 MB/s Max. (SATA 3.0)											
	Q'ty	8 (AIMB-588Q); 8 (AIMB-588R); 4 (AIMB-588H)											
Rear I/O	Display Port	2											
	HDMI	1											
	Ethernet	2 (AIMB-588Q); 4 (AIMB-588R);1(AIMB-588H)											
	USB	AIMB-588Q: 4 USB 3.2 Gen2 type A; 1 USB 3.2 Gen1 type A; 1 USB3.2 Gen2 Type C; 4 USB 2.0 type A AIMB-588R: 5 USB 3.2 Gen2 type A; 1 USB 3.2 Gen2 Type C; 4 USB 2.0 type A AIMB-588H: 2 USB 3.2 Gen2 type A; 4 USB 2.0											
	Audio	2 (Mic-in/ Line-out)											
Internal Connector	USB 3.2	AIMB-588Q: 3 USB 3.2 Gen1 AIMB-588R: 3 USB 3.2 Gen1 AIMB-588H: 2 USB 3.2 Gen1											
	USB 2.0	0											
	Serial	6 (5 x RS-232, 1 x RS-232/422/485 with auto flow control)											
	SATA 3.0	8											
	Extended Display Port (eDP)	1											
	M.2 (M key)	1 2280 NVMe PCIe4 (AIMB-588Q/AIMB-588R)											
	GPIO	8-bit GPIO											
Watchdog Timer	Output	System reset											
	Interval	Programmable 1 ~ 255 sec/min											
Power Requirements	Power On	Intel LAG1700 Xeon 12th Gen Intel® Core™ i7-12700TE 1.40GHz, with 4 pcs 16GB DDR4 4800 MHz ECC DIMM +5 V 3.3 V 12 V 12V_8P 5 Vsb 1.89A 0.67A 0.08A 0.18A 3.4A											
	Operating	Non-Operating											
Environment	Temperature	0 ~ 60 °C (32 ~ 140 °F), depends on CPU speed and cooler solution -40 ~ 85 °C (-40 ~ 185 °F)											
	Dimensions	244 mm x 244 mm (9.6" x 9.6")											
Physical Characteristics	Input Mode	ATX input											

## Block Diagram

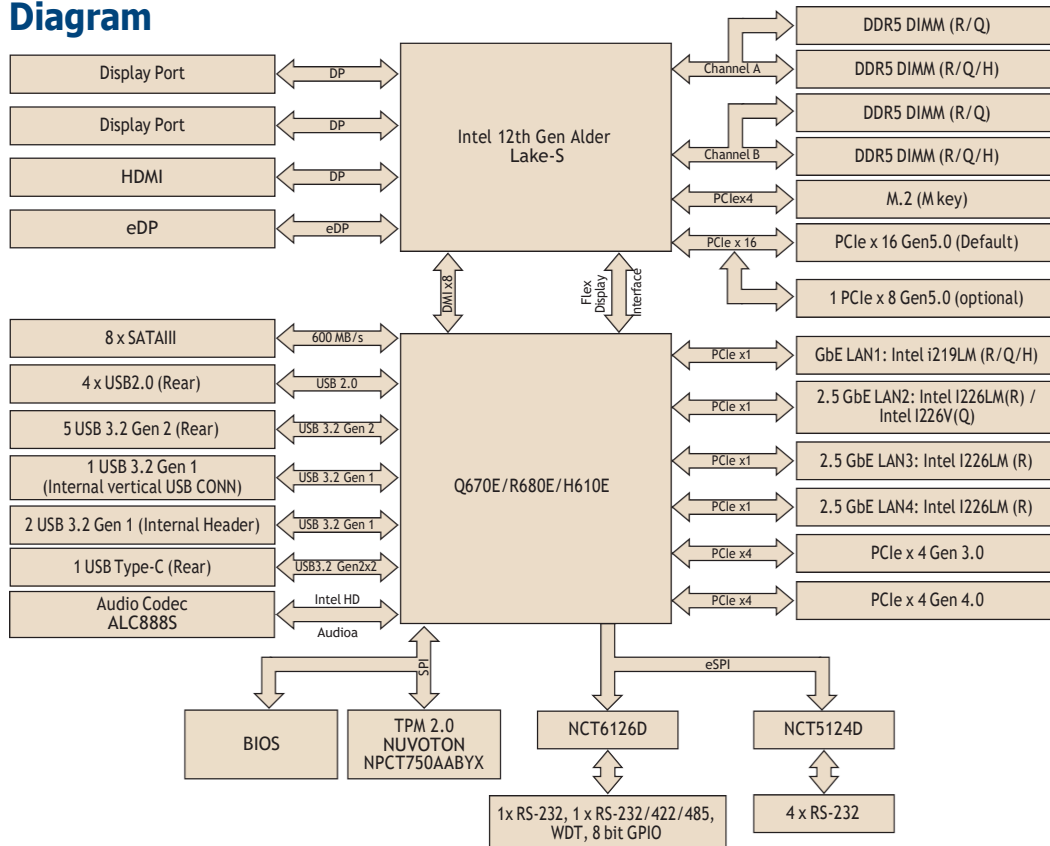

## Ordering Information

P/N	Chipset	USB 3.2 Gen 2	USB 3.2 Gen 1	USB Typc-C Gen 2x2	USB 2.0	PCIe x16* Gen5	PCIe x8* Gen4	PCIe x4 Gen3	PCIe x4 Gen4	GbE LAN	2.5GbE LAN	DP	HDMI	eDP	SATA III	COM	M.2 M-key	TPM	Windows Server support
AIMB-588Q-00A1	Q670E	4	4	1	4	1	0	1	1	1	1**	2	1	1	8	6	1	1	No
AIMB-588R-00A1	R680E	5	3	1	4	1*	0 (1)*	1	1	1	3***	2	1	1	8	6	1	1	Yes
AIMB-588H-00A1	H610E	2	2	0	4	1	0	1	0	1	0	2	1	1	4	6	0	1	No

(\*) means BOM option

\* BOM option support: PCIe x8 Gen5 signals at PCIe x16 slot and PCIe x8 Gen4 signals at PCIe x8 slot

\*\* LAN2: 2.5GbE Intel I226V

\*\*\* LAN2: 2.5GbE Intel I226LM; LAN3: 2.5GbE Intel I226LM; LAN4: 2.5GbE Intel I226LM

## Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2
19Z0002619T000	I/O port bracket	1
1930001071	M.2 device screw	2
2046058800	AIMB-588 Startup Manual	1

## I/O View



## Optional Accessories

Part Number	Description
1700020277-01	Dual port USB 3.0 cable 30cm with IO bracketDual port USB 2.0 cable 27cm with bracket
1700022363-01	1-to-1 serial port cable kit, 17cm
1700030647-01	1-to-1 serial port cable kit, 30cm
1700000447	1-to-4 serial ports cable kit, 45cm
1701400181	1-to-4 serial ports cable kit, 18cm
1970005349T001	LGA1700 CPU cooler for 2U chassis, for CPU TDP 65W, 78.0(W) x 78(L) x 55.4 (H)

Note: Purchasing AIMB-588's proprietary CPU cooler is a must, other CPU cooler might be not compatible with AIMB-588. Note: screws P/N: 1933030500 for ACP-1010MB, 1930004607 for HPC-7120S

## Embedded OS/API

OS/API	Part No.	Description
win10 IoT Ent	20706WX1HS0017	img W10 21HL (Eng)
	20706WX1VS0017	img W10 21VL (Eng)
	20706WX1ES0017	img W10 21EL (Eng)
Ubuntu 22.04 LTS	20706U22DS0009	Ubuntu 22.04 LTS Desktop 64bit