


AIMB-788

LGA1700 12th Generation Intel® Core™ i9/i7/i5/i3 ATX Motherboard with DP/HDMI/VGA, DDR4, USB 3.2, M.2

Preliminary

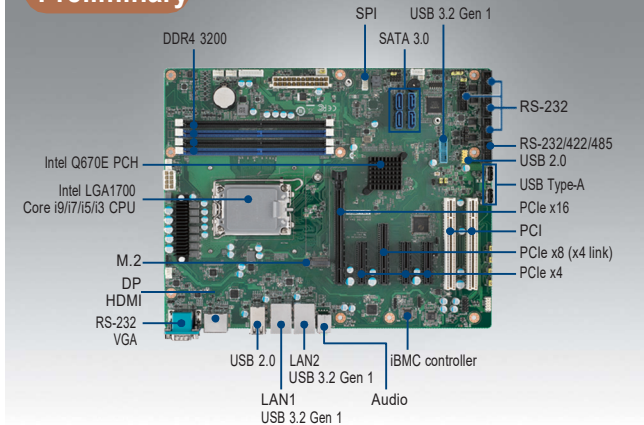

Features

- Intel® 12th generation Core™ i9/i7/i5/i3 & Pentium®/Celeron® processor with Q670E chipset
- Four DIMM sockets up to 128 GB DDR4 3200
- Triple display DP/HDMI/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2 Gen 2
- Supports Intel vPro, AMT & TPM technologies
- iBMC remote out-of-band power management solution on DeviceOn


Quiet Specifications



	CPU	i9-12900(E)	i9-12900TE	i7-12700(E)	i7-12700TE	i5-12500(E)	i5-12400	i5-12500TE	i3-12100(E)	i3-12100TE	Pentium G7400E	Pentium G7400TE	Celeron G6900E	Celeron G6900TE			
Processor System	P-core Base Frequency	2.4 GHz	1.1 GHz	2.1 GHz	1.4 GHz	3.0 GHz	2.5 GHz	1.9 GHz	3.3 GHz	2.1 GHz	3.6 GHz	3.0 GHz	3.0 GHz	2.4 GHz			
	L3 Cache	30 MB	30 MB	25 MB	25 MB	18 MB	18 MB	18 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB			
	Cores	16	16	12	12	6	6	6	4	4	2	2	2	2			
	Processor Base Power	65W	35W	65W	35W	65W	65W	35W	60W	35W	46W	35W	46W	35W			
	Socket	LGA 1700															
	Chipset	Q670E															
	BIOS	AMI 256MB SPI Flash															
Expansion Slot	PCI	2															
	PCIe x4 (Gen 3)	3															
	PCIe x8 (Gen 3)	1 (x4 link)															
	PCIe x16 (Gen 4)*	1															
Memory	Technology	Dual Channel DDR4 3200 Non-ECC UDIMM															
	Max Capacity	128 GB															
	Sockets	4 x 288-pin DIMM															
Graphics	Controller	Chipset integrated Intel UHD Graphics															
	VRAM	Shares system memory is subjected to OS															
Ethernet	Interface	10/100/1000 Mbps															
	Controller	GbE LAN1: Intel I219-LM (PHY); GbE LAN2: Intel I210-AT															
	Connector	2 x RJ-45															
SATA	Max. Data Transfer Rate	600 MB/s															
	Channel	4															
	RAID	0, 1, 5, 10															
Rear I/O	VGA	1 (Resolution up to 1920 x 1200 @ 60Hz)															
	HDMI	1 (Resolution up to 3840 x 2160 @ 60Hz)															
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60Hz)															
	Ethernet	2															
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)															
	Audio	2 (Line-out, Mic-in)															
	Serial	1 (RS-232)															
Watchdog Timer	Output	System reset															
	Interval	Programmable 1 ~ 255 sec															
Power Requirement	Power On	Intel Core i 65W , DDR4 32 GB x 4															
	Voltage	+3.3 V			+5 V			+12 V			+5 Vsb			-12 V		-5 V	
	Current	1.41 A			2.42 A			9.3 A			0.13 A			0.04 A		0.05 A	
Internal Connectors	USB	6 (2 x USB 3.2 Gen 1 via pin header, 2 x USB 2.0 via pin header, 2 x USB 2.0 type A connector)															
	Serial	5 (4 x RS-232, 1 x RS-232/422/485)															
	SATA	4															
	M.2	1 (PCIe4 M-key 2280 type)															
	SPI	1															
GPIO	8-bit																
Environment	Temperature	Operating									Non-Operating						
	Humidity	0 ~ 60 °C (32 ~ 140 °F), depends on CPU loading and system thermal solution									-40 ~ 85 °C						
Physical Characteristics	Humidity	95% @ 40 °C, non-condensing									95% @ 60 °C, non-condensing						
	Dimension (L x H)	304.8 x 244 mm (12" x 9.6")															

* The PCIe x16 slot, from CPU, can only support graphic cards and storage cards according to the specification recommended by Intel. Other types of add-on cards might not work properly. For the compatible device list validated on the PCIe x16 slot, please refer to the user's manual.

Block Diagram

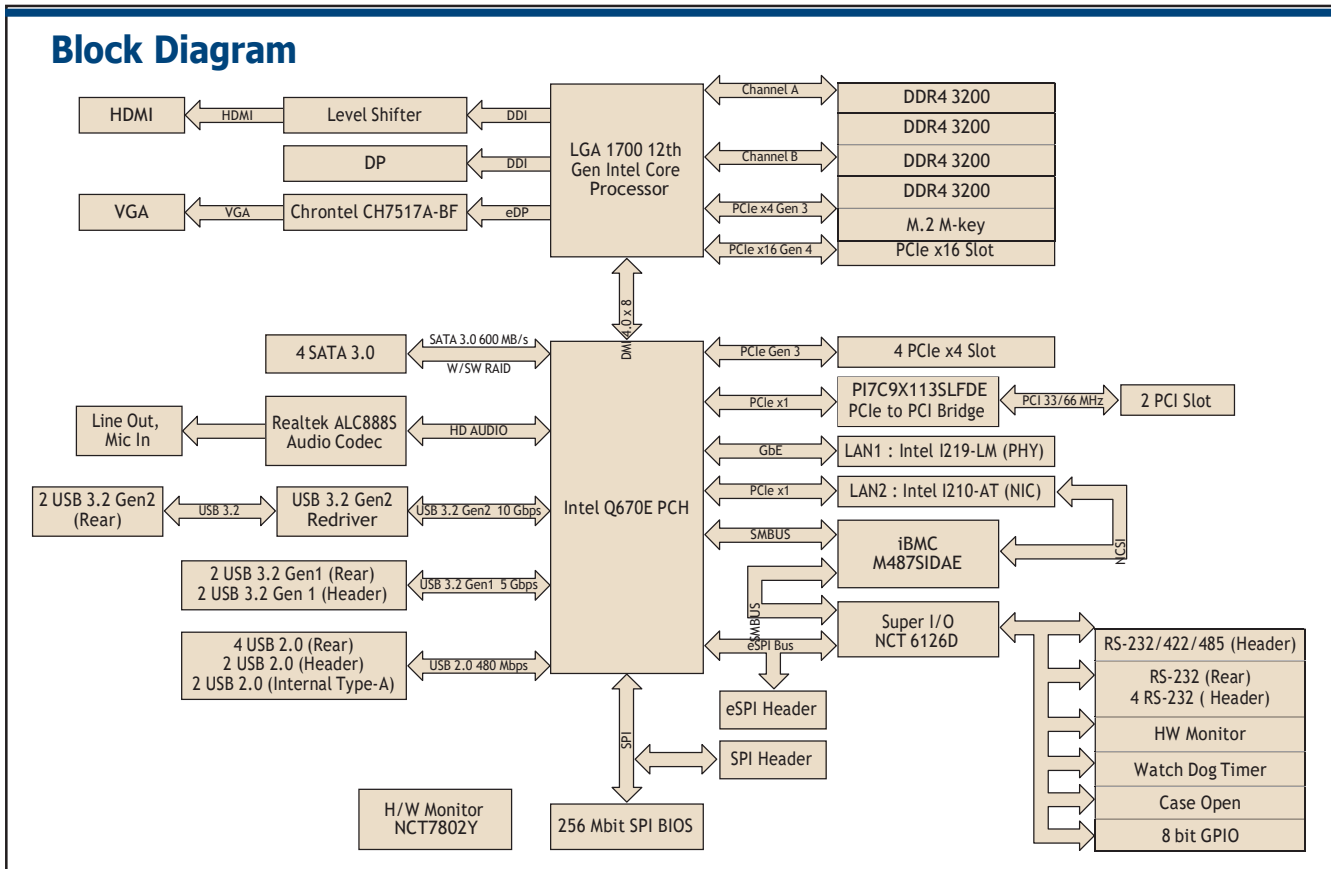

Ordering Information

Part number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID	iBMC
AIMB-788G2-00A1	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes

Packing List

Part Number	Description	Qty
1700003194	SATA data cable	2
1960104181T001	I/O port bracket (for 2U chassis or higher)	1
2041078800	Startup manual	1

Note: Driver CD is not provided.

I/O View



AIMB-788G2-00A1

Optional Accessories

Part number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1970005349T000	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=35~125W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
PCA-TPMSPI-00A1	TPM 2.0 SPI-interface module

Note: Purchasing AIMB-788's proprietary CPU cooler is highly recommended. Other brands' CPU coolers are NOT compatible with AIMB-788. Especially the cooler type with fan aside is not allowed to use on AIMB-788 because of MOSFET location.

Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PCIe16 & 1 PCIe1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PCIe16 & 2 PCI expansion
AIMB-R4301-03A2E	2U riser card with 1 PCIe1 expansion

Note: AIMB-788 is not compatible with 1U chassis.